



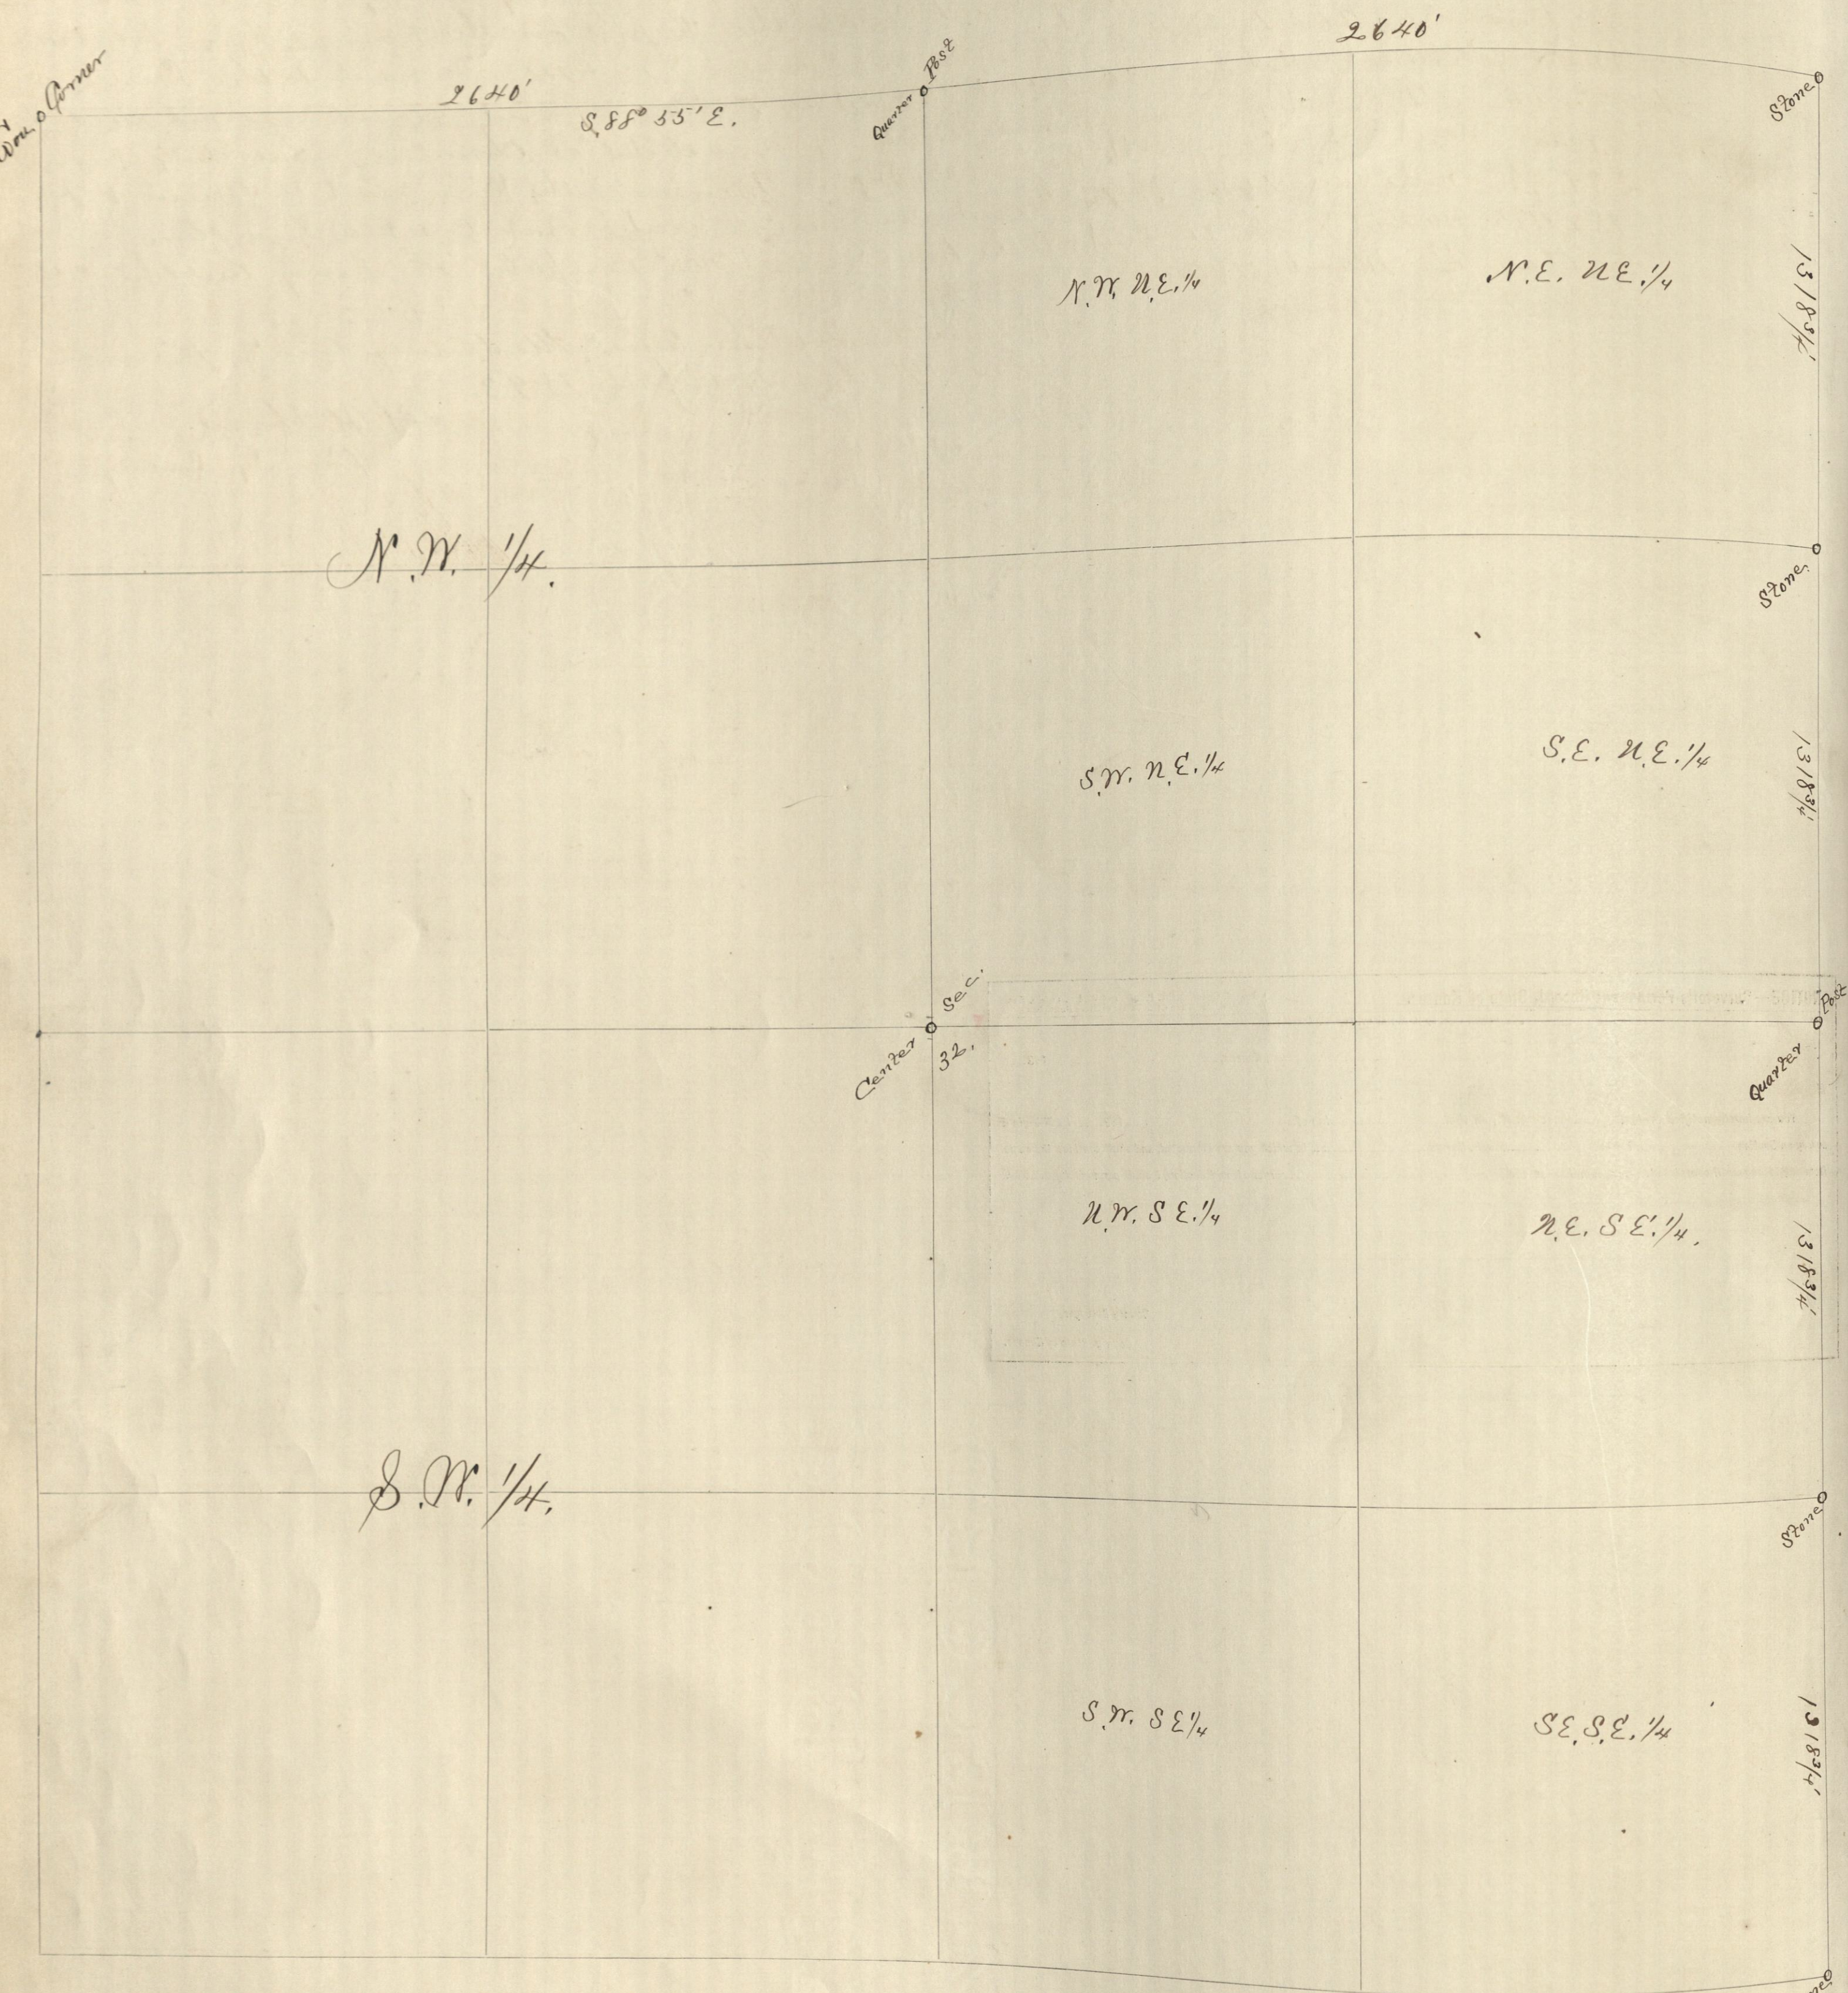

NOTE.—SCALE..... CHAINS TO THE INCH IS USED IN THIS DIAGRAM.

This diagram to be used in platting either one, four or sixteen sections. When used for one section only, scale No. 1 applies; for four sections, scale No. 2; and for sixteen sections, scale No. 3.

General Statutes 1895, § 180: "And no diagram shall be constructed to scale less than one inch to twenty chains."

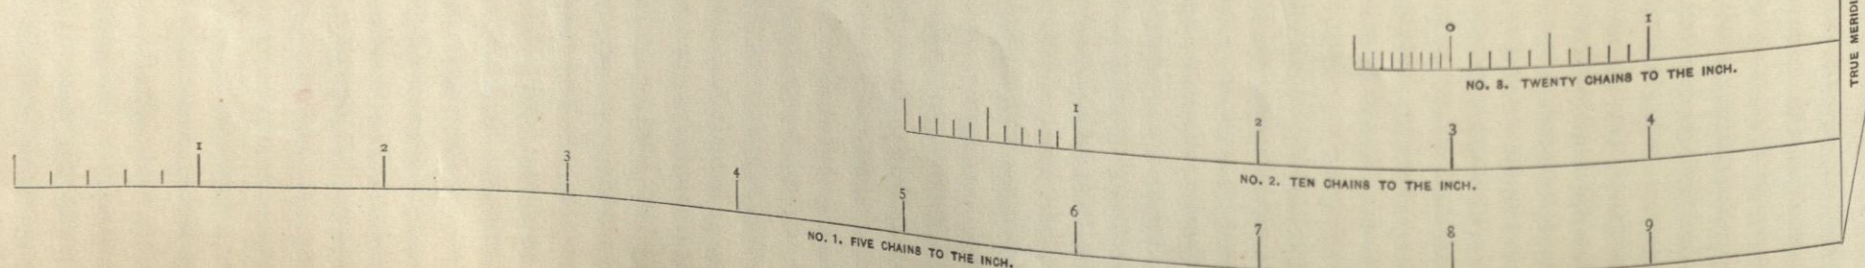

This is to certify that I, S. H. Hibbard, County Surveyor of Montgomery County, Kansas, was ordered by E. M. Engman to survey and subdivide Section 32, Township 34, Range 16. Order given on March 16th 1893. On March 21st 1893 the following named parties were notified that a survey of the above named section would be made on the 29th day of March 1893. John R. Carnes, E. M. Engman, Sarah L. Davis, William Bessinger, W. H. Allen, W. H. Tallman, J. D. Fisher, Malinda Biddle, Mary E. Nitner, Mrs. (W. A. Ross), Simon Phillips, E. A. Osborn, William W. Taylor, Hollis Ford.

On the 29th day of March 1893, I began the survey. Admitted E. Engman and John R. Carnes were chosen as chairman and were duly sworn. I began at the North West corner a permanent stone corner S. 88° 30' E. at 2640' down stake as temporary 1/4 corner North Side Section 32, T. 34, R. 16 E. at 5280' down stake as temporary 1/4 corner South East corner of Section 28, Town and Range as above, Ran N 89° 15' W. at 5287 ft. temporary stake. I then went to the South East corner of Section 32 and found this corner post. I found the South East corner of Section 33, T. and R. as above, standing from this corner 2800' N. 89° 00' W. on Section line at 2645 ft. found 1/4 post standing at 5290 ft. I set a line stone 22" x 12" x 8" marked 1111, for corner to bet. 4 and 5 T. 35 + Section 32 and 33 T. 34. From this corner now located I ran with between Sections 32 and 33 at 2640' down stake as temporary 1/4 corner, at 5270' temporary corner. I then went North to the N.E. corner of Section 29, Township 34, R. 16 E. Ran with from the corner stone which I found standing at 5305 ft. temporary corner. I erected corner 5 ft. North. Here I set a line stone 28" x 20" x 4" marked 1111 for corner to bet. 28, 29, 32 + 33. Connected 1/4 post on East Side Section 32, 24 ft. South. Here I set a 30" x 12" x 6" M. 1/4. At a point 1318 1/2 ft. North of South East corner of Section 32, I set a 28" x 8" x 6" M. X. At a point 1318 1/2 ft. South of N.E. corner of Section 32 I set a line stone 12" x 9" x 4" marked X. I connected temporary 1/4 post on North line of Section 32, 24 ft. North. Here I set a line stone 24" x 6" x 3 1/2" marked 1/4.

This completed the survey on March 30th 1893, Mon. 9° E.

Noted at Independence, Montgomery County, April 19th 1893
Recorded on the 19th of April '93

S. H. Hibbard,
County Surveyor.

NOTICE—Surveyor's Permanent Record, State of Kansas.

(Copyright, 1895, by B. A. Bailey, Topeka, Kansas.)

Independence, Kansas, March 21, 1893.

M. You are hereby notified that, at 9 o'clock A. M., on the 29 day of March, 1893, I will begin a survey on Section 32, Town 34, South, Range 16, in which you are interested, and shall continue the same from day to day until completed. Commencing at the corner of said Section, I shall permanently establish

S. H. Hibbard, County Surveyor,
Montgomery, County, State of Kansas.