

Survey No. _____, Section 23 & 26, Town 34 South, Range 16


Survey No. _____, Section 23 & 26, Town 34 South, Range 16



NOTE.—SCALE.....CHAINS TO THE INCH IS USED IN THIS DIAGRAM.

This diagram to be used in platting either one, four or sixteen sections. When used for one section only, scale No. 1 applies; for four sections, scale No. 2; and for sixteen sections, scale No. 3.

General Statutes 1892, § 850c: "And no diagram shall be constructed to scale less than one inch to twenty chains."

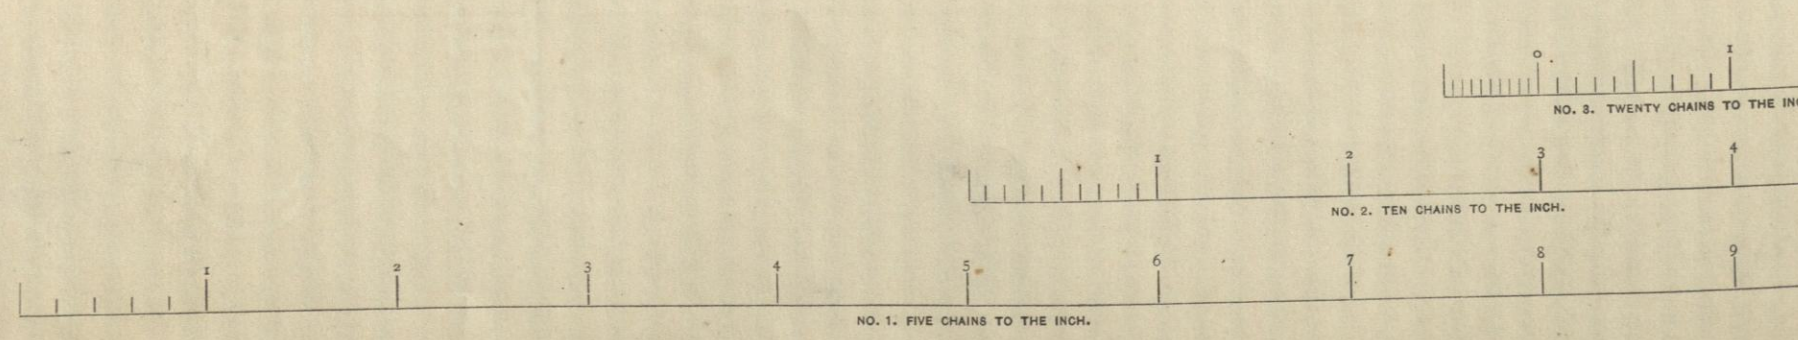

This is to certify that I S.H. Hibbard County Surveyor of Montgomery County, Kansas, was ordered by A. Stark to survey and subdivide Sec. 26 T. 34 S. R. 16 E. On Feb. 10th 1894. March 5th 1894. The following named parties were notified that a survey of the above described section would be made on March 14th 1894. A. Stark, L.C. Tolbort, Daniel H. Hitt, N.E. Hall, Chas. J. Hitt and Richard Hitt. On March 14th 1894, I began the survey. Roy Hitt and T.E. Laor were selected as Chain Carriers and were duly sworn. I began at the 1/4 post a stone on the South line Sec. 26 T. 34 S. R. 16 E. Also set a flag at the center of Sec. 26 which I found standing measured on a straight line connecting the two ponds. Measured North 20° West at 818 ft. to the edge of the line 150 ft. wide at 1320 ft. down stake at 2618 ft. center Sec. 26. Connection North 9 ft. and set a line stone 25x6x3" also iron pin for N.W. corner S.E. 1/4 Sec. 26. Measured North from S.E. corner Sec. 26 to the 1/4 post on East line (a stone) of Sec. 26 found the distance to be 2629 ft. The N.E. corner of the S.E. 1/4 Sec. 26 being in the river I set a line stone 12x12x3" marked X 100 ft. South of the true corner on the section line on South Bank of the Verdigris River. I also established the E. and N. 1/4 line through Station 26 by setting flags on the 1/4 post and adjusting my transit between the corners, but were dead and stakes driven to mark the line. I also ran from the center of Sec. 26 to the 1/4 post on the North line came out 13 ft. East of the corner corrected and drove stakes on line. From the 1/4 post on the South line Sec. 23 ran North 66° West at a line stone at 1317 ft. set a flag stone and iron pin as center of 1/4 line on S.E. Sec. 23 the distance from the 1/4 post on South line Sec. 23 to a stone center of section was 2634 ft. At a point 40 rods North and 32 rods East of the 1/4 post on South line Sec. 23 I set a line stone and iron pin for N.E. corner of section 26 at a point 132 rods East of 1/4 post on line of Sec. 23 I set a line stone as S.E. corner of the section tract as shown by plat.

Var. 8° 50' E. Dated at Independence Montgomery Co. Kansas March 17th 1894.

S.H. Hibbard -
Co. Surveyor.

NOTICE—Surveyor's Permanent Record, State of Kansas.

(Copyright, 1891, by R. A. Baker, Topeka, Kansas.)

Independence, Kansas, March 5th 1894.

M. _____ You are hereby notified that, at _____ o'clock A. M., on the _____ day of _____, 1894, I will begin a survey on Section _____, Town _____, South, Range _____, in which you are interested, and shall continue the same from day to day until completed. Commencing at the _____ corner of said Section, I shall permanently establish _____.

S.H. Hibbard, County Surveyor,
Montgomery County, State of Kansas.