

FIELD NOTES OF SURVEY NO.

On Feb. 26th 1889 I was ordered by T. C. Owen to survey and subdivide Section 34, T. 31, R. 14 E.

Feb. 28th 1889 the parties named below were notified that a survey of Section 34, T. 31, R. 14 E., would be made on March 13th 1889.

James Kelley	Peter DeGanimore
J. O. Whistler	John DeGanimore
J. B. Owen	James Lovelady
Charley Woodworth	A. D. Widner
T. C. Owen	Mrs. M. E. Denny
John A. Cushman	Alice Garst
John Patterson	Thomas Whistler
John Stanford	E. L. Owen
A. J. Davidson	Miles Drybread
John Duff	O. S. Duff
Henry Loring	Salma Manrow
William Tankesley	Robert Shaffer

On March 13th 1889, I proceeded to survey and locate the corners as shown by the above plat beginning at the South West corner of Section 34, T. 31, R. 14 E. at a sand stone I ran north 10 W. at 2437 ft. Gov. $\frac{1}{4}$ post at 5277 ft. Gov. corner at 1320 ft. South of the N.W. corner on Section line I set a Lime Stone 24 x 16 x 4 marked X. From the $\frac{1}{4}$ post on the West side of the Section ran South 10 East 1318 ft. set a sand stone 24 x 10 x 4 marked X. From the South West corner of Section 34, I ran S. 89° 30' E. at 2625 ft. found a Gov. Stone buried for $\frac{1}{4}$ corner marked A. at 5290 ft. drove stake for temporary corner at S.E. corner of Section 34. I then measured from the $\frac{1}{4}$ line from the East line of Section 3, T. 32, R. 14 E. north as per Government field notes and corrected. Set the Section corner for corners to Sections 34, 35, 27, 36. Line Stone 24 x 14 x 3 marked IIII, which was on the South line but 5 ft. West of the temporary corner. From the South East corner of Section 34 I ran north 5300 ft. to center of East & West road drove stake for temporary corner to Sections 26, 27, 34 & 35. I then went to the N. West corner of Section 34. I set a flag on the $\frac{1}{4}$ post on the North line of the Section I ran a line from the N.W. corner to the $\frac{1}{4}$ post on North line distance 2635 ft. I extended this line on same bearing S. 89° 45' E. at 5280 ft. came out about 4 inches north of temporary corner. Here I set a lime stone 20 x 11 x 3 marked IIII for the corner to Sections 26, 27, 34 & 35. I then ran South from this corner at 2650 ft. set a lime stone 18 x 16 x 3 marked 4 for $\frac{1}{4}$ corner, I ran South at 3975 ft. set a lime stone 20 x 15 x 4 marked X for the N.E. corner of the South $\frac{1}{2}$ of the S.E. $\frac{1}{4}$. As the $\frac{1}{4}$ post on the South line of Section 34 was small but had the Government mark I set beside it a lime stone 24 x 14 x 3 marked $\frac{1}{4}$ for a witness. Letting ^{flag} on the quarter posts I went to the center of the Section joining the opposite $\frac{1}{4}$ posts with straight lines and where these lines intersected I established the center of the Section which agreed with the chaining, here I set a sand stone 24 x 10 x 6 marked XX. At a point on the $\frac{1}{4}$ line north of the center corner 1321 $\frac{1}{2}$ ft. I set a sand stone 24 x 7 x 3 marked X. at 1321 $\frac{1}{2}$ ft. South on the $\frac{1}{4}$ line from the center of the Section I set a lime stone 24 x 12 x 3 marked X which finished the survey as ordered.

Var. 9° 30' E.


Dated at Independence Montgomery County Kansas this 21st day of March 1889.
Recorded March 21st 1889 at 11 A.M.

J. L. Griffin Register of Deeds.

S. L. Hibbard
County Surveyor.

Plat of Survey No. -
Section 34, Twp. 31, Range 14.
Ordered by
T. C. Owen

Completed March 14, 1889.

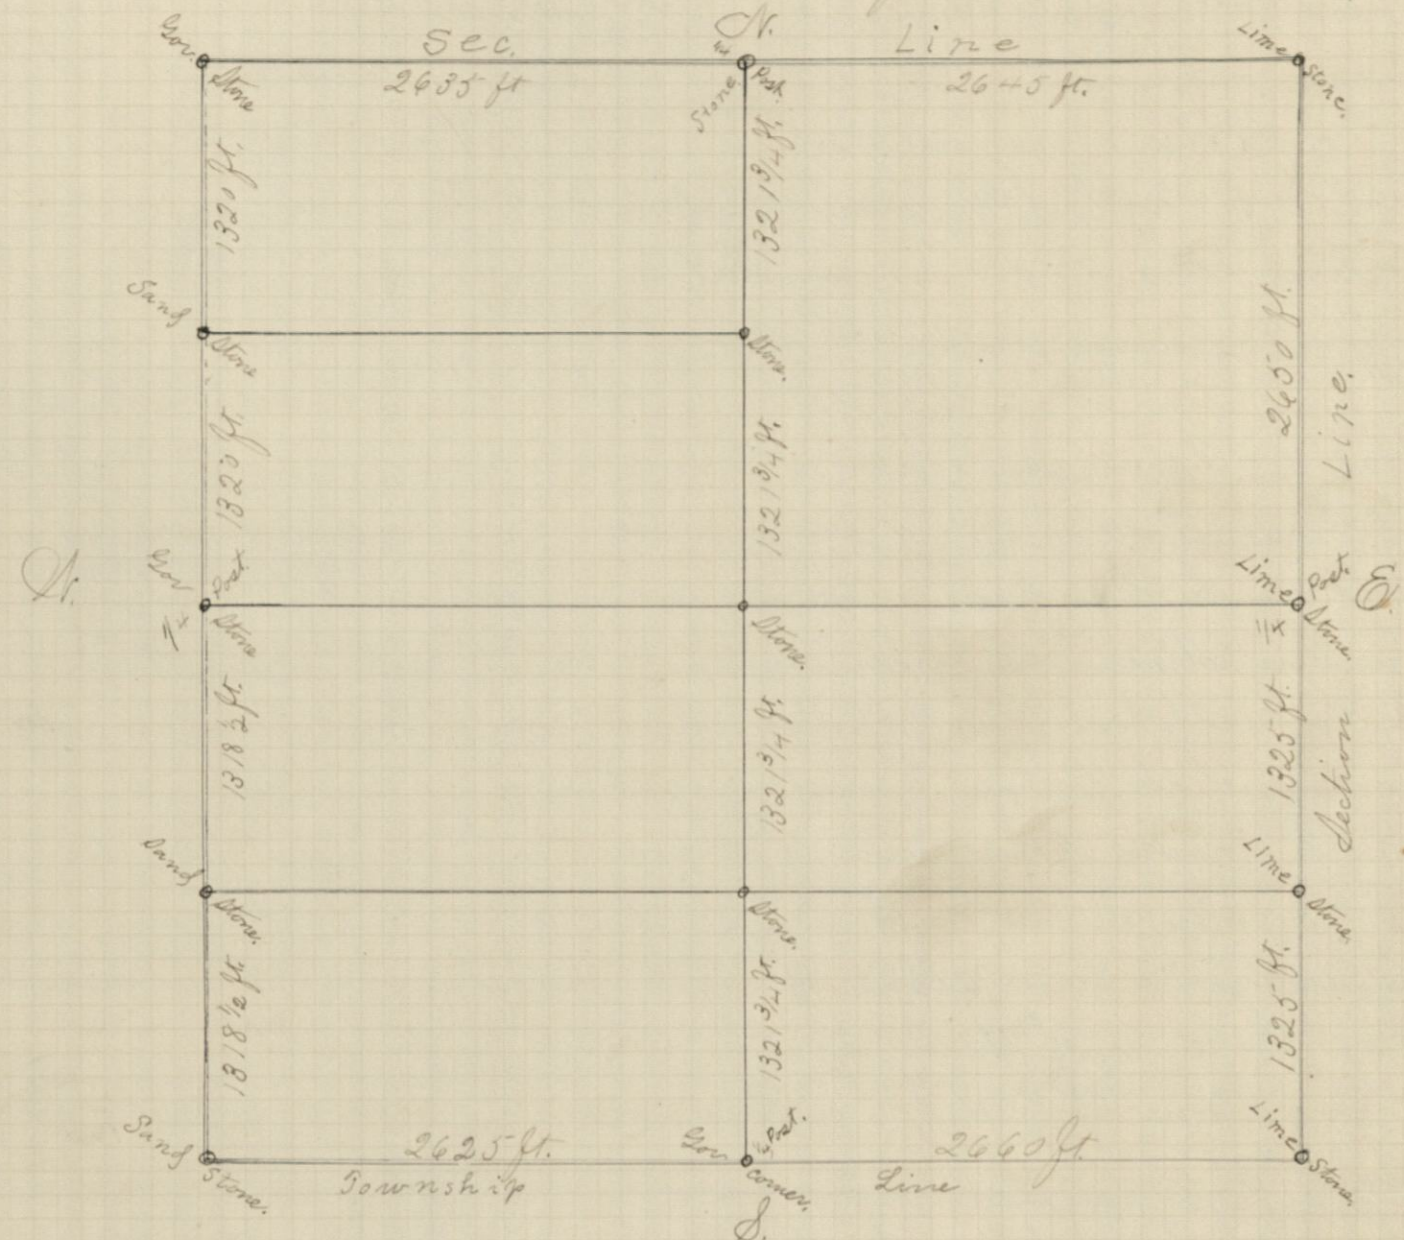

Scale - - - to one mile

I hereby certify that the above is an accurate plat of said survey.

S. L. Hibbard

County Surveyor.