FIELD NOTES OF SURVEY NO.

Hamilton & Orr, Manufacturers Topeka, Kansas

I was ordered by A. Toft (agent for J.W. Parker) on June 17, 1889 to survey the lands of J.W. Parker and establish the corners to the same situated in Sections 7.8.17 & 18. Township 35, Range 17, East. July 3, 1889 the following named parties were notified that I would meet them at the residence of E. J. Waud on July 18th, 1889 at ten o'clock A.M. for the purpose of surveying the above named sections.

John Hyning	E. J. Waud
J.H. Hand	L.H. Singleton
James Powell	J.W. Parker
Geo. W. Russell	Michiel Green
E.L. Foster	Joseph Benedum
Adam Beatty	

July 18, 1889 I met the parties as notified. William Casto & John Webb were selected as chain-carriers and William Russell as flagman. They were sworn. We then went to the South East corner of Section 7. Here I found a Government corner stone, from this I ran South at 1320 ft. I drove a stake for temporary corner for S.E. corner of N.E. ¼ of the N.E. ¼ of Sec. 18, at 2351½ ft. distance given in Government field notes to the South boundary of Kansas I drove a stake corner missing. From field notes I found an Elm N. 79° 30' W. 30 inches in diameter 52 ft. distant and marked. corrected stake S.E. 2 ft. From the S.E. corner of the N.E. ¼ of the N.E. ¼ of Section 18, I ran N. 85° 45' W. at 1320 ft. drove stake as temporary corner at 2640 ft. drove a stake as temporary corner for S.W. corner of W.W. ¼ of N.E. ¼ of Section 18. I then ran North 1320 ft. came out 2 ft. North of the ¼ post between Sections 7 and 18. From this ¼ post I adjusted my Transit to a flag on the S.E. corner of Section 7. bearing S. 85° 45' E. at 1320 ft. I drove stake for temporary corner for N.W. corner of N.E. ¼ of N.E. ¼ Section 18. I then ran North 1320 ft. drove stake as temporary corner for N.W. corner of S.E. ¼ of S.E. ¼ of Section 7. I ran North on the same course at 3960 ft. drove stake for N.E. corner of S.W. ¼ of N.E. ¼ of Section 7. – I then ran North 85° 45' West 2640 ft. came to a hedge here I drove a stake for the North West corner of Lot 6. Section 7. This finished the days work, on July 18 the next day the 19th it rained I adjourned the survey until the 24 day of July. On July 24, 1889 the survey of the above described lands was continued William Casto and John Webb chainmen and William Russell marker I ran from the stake driven for the N.W. corner of the S.E. ¼ of S.E. ¼ of Section 7. N. 85° 45' W. 2640 ft. drove stake for the S.W. corner of Lot 7 of Section 7. July 25th I ran north from the S.W. corner of Lot 7 of Sec. 7 at 1320 – found a stone N.W. corner of Lot 7 at 2638 ft. found stake driven for N.W. corner of Lot 6 of Section 7. Set the stake 2 ft. north for correction from this point I ran North 1320 ft. drove stake on north line of Section 7. I then went East to the N.E. corner of Section 7 ran West bearing N. 85° 45' W. 3960 ft set stake now corrected 5 ft. West. Here I set a Lime stone 24" × 8" × 6" marked X for N.E. corner of Lot 2 of Section 7. – I then went to the S.E. corner of N.E. ¼ of N.E. ¼ of Sec. 18 and ran a line S. 85° 45' E. at 1320 ft. drove stake. I then went North – the N.E. corner of the S.W. ¼ of S.W. ¼ Section 8 and ran South from a stone in the center of the State Road 2640 ft. came out 20 ft. North of the stake corrected stake and here set a stone, lime stone 24" × 14" × 6" marked X for S.E. corner of N.W. ¼ of N.W. ¼ of Section 17. – as all stakes driven as temporary corners are now correct I proceeded to plant stones in their places. For the S.E. corner of the N.E. ¼ of the N.E. ¼ Sec. 18. I set a lime stone 18 × 10 × 2½ marked X at the S.W. corner of the N.E. ¼ of N.E. ¼ of Section 18 I set a lime stone 18 × 8 × 6 marked X. At the S.W. corner of the N.W. ¼ of the N.E. ¼ of Section 18. Set a lime stone 18 × 14 × 3 Marked X X. At the N.W. corner of the N.E. ¼ of the N.E. ¼ of Section 18. I set a lime stone 24 × 8 × 2½ marked XX. At the N.W. corner of the S.E. ¼ of S.E. ¼ of Section 7 I set a lime stone 18 × 14 × 2 marked X. At the S.W. corner of Lot 7 of Section 7 I set a lime stone 18 × 8 × 6 marked XX. At the S.E. corner of Lot 2 of Section 7. I set a lime stone 24 × 6 × 6 marked X. At the N.E. corner of the S.W. ¼ of the N.E. ¼ of Sec. 7, I set a lime stone 24 × 12 × 6 marked X. Var. 9° 30'.

Dated at Independence Montgomery – Kansas Aug. 1st 1889.

S.L. Hibbard
County Surveyor.

Recorded August 2, 1889 at 5 P.M.
J.L. Griffin Register of Deeds.

Plat of Survey No – of
Sections 7.8.17 & 18. Twp. 35. Range 17 E.
Ordered by J.W. Parker, completed July 25, 1889.

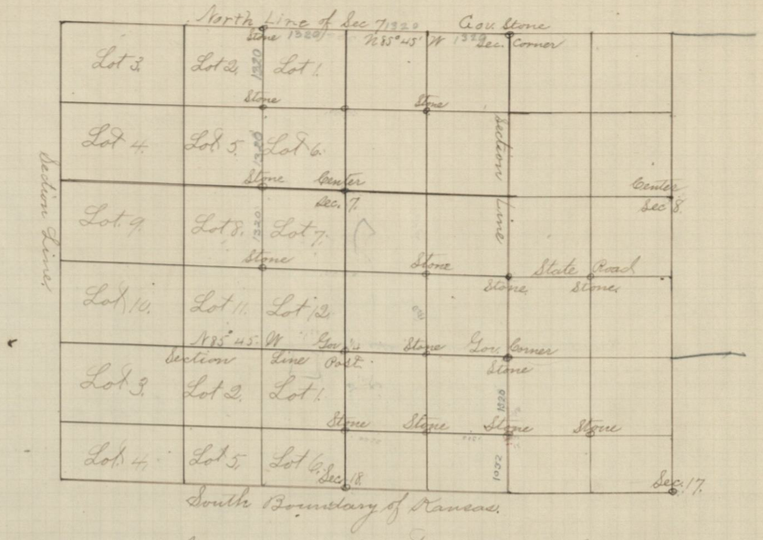

Scale – – – To one mile.

I hereby certify that the above is an accurate plat of said survey

S.L. Hibbard
County Surveyor