

FIELD NOTES OF SURVEY NO.

Hamilton & Co. Manufacturers Topeka, Kansas

August 17, 1889, I was ordered by Abraham Royer to survey and establish some corners in Section 27, Township 33, Range 17 East. September 4, 1889, the following named parties were notified that a survey of Section 27, T. 33, R. 17, would be made on September 16, 1889.

Abraham Royer.

Chris Royer.

Fred Royer.

Peter Statte.

L. D. Farbro.

Jesse Brandalls.

T. Crowley.

On September 16, 1889, I proceeded to survey and establish the corners and lines in dispute. Charles Quincy was sworn as chainman and assisted me in chaining. I began at the South East corner of Section 27, here I found a Government Stone. I ran N. 35° W. 2735 ft. to the Government $\frac{1}{4}$ post on the East side of Section 27, Thence North 1° 20' East 2682 ft. drove stake for corners of Sections 22, 23, 26 & 27 from this point I ran S. 89° 15' W. at 2640 ft. drove stake 29 1/2 ft. East of the line of hedge running North through the center of Section 22, T. & Range as above. I then ran S. 88° W. at 5221 ft. I found line stones on Section line running North & South at North West corner of Section 27. The point located for quarter post on North line of Section 27, was located by an affidavit and sworn to before me as follows.

Liberty Kansas September 16, 1889.

This is to certify that we the undersigned John Lane, Samuel Hugo and Charles Roszel, can locate the point or within three feet of the point where the Government quarter post ($\frac{1}{4}$) was located on the North line of Section 27, Township 33, Range 17 East, which was near the center of the road running East & West and directly South of a hedge now standing, running North, which was planted on the quarter $\frac{1}{4}$ line running North from the Gov. $\frac{1}{4}$ post now relocated on the South line of Section 22, Township 33, R. 17 East. To the above we swear as disinterested parties."

John Lane

Samuel Hugo

Chas. Roszel.

At the point located by them I set a Lime stone 22 x 10 x 2 marked "L" for the quarter post between Sections 22 and 27 T & R. as above. At the North East corner of Section 27 I set a lime stone 18 x 15 x 2 1/2 marked 1111 and put coal in pit. At 1334 3/4 ft. West of N.E. corner of Sec. 27 on Section line, I set a sand stone 18 x 14 x 6 marked X as N.W. corner of N.E. $\frac{1}{4}$ of N.E. $\frac{1}{4}$ of Section 27, T. 33, R. 17.

This survey was completed September 17, 1889.


Dated at Independence Montgomery Co. Kansas September 21, 1889.

J. L. Hibbard

County Surveyor.

Plot of Survey No. of
Section 27, Twp. 33, Range 17.
Ordered by
Abraham Royer
Completed

September 17, 1889.

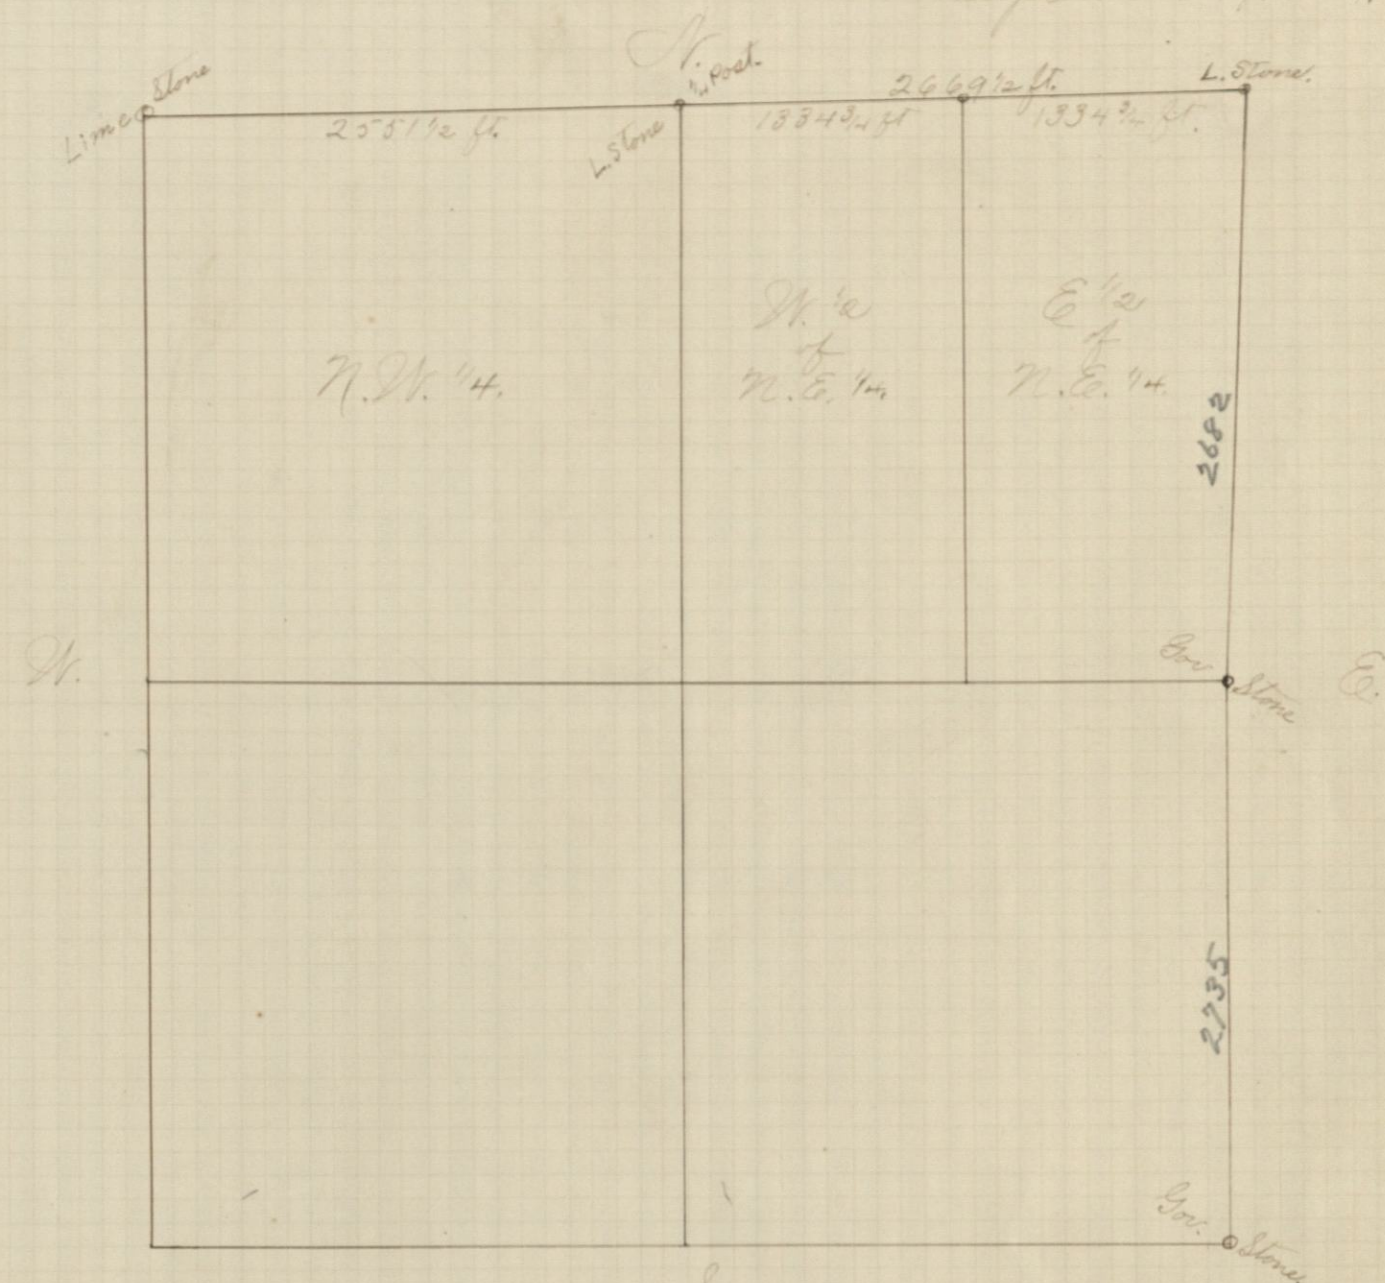

Scale - - - - - to one mile.

I hereby certify that the above is an accurate plot of said survey.

J. L. Hibbard
County Surveyor.

Recorded Sept. 21, 1889 at 2 P.M.

J. L. Griffin

Register of Deeds