FIELD NOTES OF SURVEY NO.

Hamilton & Curly Manufacturers Topeka, Kansas

I was ordered by A. T. Cox to Survey and establish the corners to the tracts of land as shown in the above plat in Section 7 and 18, Township 32 Range 15 East. November 7, 1889 the following named parties were notified that a survey of the above named Sections would be made on November 19, 1889.

Daniel Ballielle, Mary A. Ballett, J. Newton, Emery Certain (Agt. for N. N. Certain.) J.M. Reid. A.G. McCormick. A.J. Imscho. A.T. Cox. B.F. Merrick, H.H. Crane.

On November 19, 1889 I began the survey James Black and G.S. Hixson were selected chain-men and _____ as Flag-man and were sworn. I began at the Government quarter (¼) post, on the West side of Section 18. which I found standing and witnessed by trees as shown by Government field notes.

I then ran South 89° 15' East at 1280 ft. made pile of stone on bluff as this is fractional 40 acre tract, at 3920 drove Stake for temporary corner of S.W. corner of S.E. ¼ of N.E. ¼ Sec. 18. At 5240 ft. drove stake for temporary ¼ post on East line Section 18. I then went N. a Stone on the South line of Section 18. The S.E. corner of S.W. ¼ of S.W. ¼ of Sec. 18. I then ran S. 89° 16' E. at at 2642 ft. set a lime stone 28"×20"×8" marked X. At 3962 ft. on S.E. corner of Sect. 18. I set a sand stone 18"×12"×4" Marked IIII. I then ran North on East line of Section 18. at 2640 ft. drove Stake, which was 3 ft. N. and 2 East of temporary ¼ post. Thence North at 5280 ft. drove Stake as temporary N.E. corner of Section 18. I then ran North on East line of Section 7 at 2648 ft. came out 7 ft. West of Government ¼ post which I found standing. From this ¼ post I ran N. 89° 15' West at 1320 ft. I set a stone on pile of stone for N.W. corner of N.E. ¼ of S.E. ¼ of Section 7. This completes Survey of Nov. 19.

On the morning of the 20th. I began at the Gov. ¼ post on the West side of Section 18 and ran North on the Range line at 1320 ft. made pile of stone for N.W. corner of S.W. ¼ of N.W. ¼ Sec. 18. at 2643 ft found Government corner down I reset corner and set a lime stone 4½ ft long, 2½ ft. wide and eight inches thick beside and as witness to North West corner of Section 18. I then ran S. 89° 15' E. at 1277 as per Gov. field notes made corner to fractional 40 at 2597 ft. found Government ¼ post down reset it by piling stone about it. at 3917 drove stake for temporary corner to N.W. corner of N.E. ¼ of N.E. ¼ Sec. 18, at 5237 ft. drove stake came out 2 ft. East of temporary corner established as I ran North, here I set a lime stone 24"×9"×4" marked IIII for N.E. corner of Section 18. at 1320 N. 89° 15' W. I set a sand stone 30"×12"×5" marked × as N.W. corner of N.E. ¼ of N.E. ¼ of Sec. 18. For the ¼ post on the East side of Section 18 I set a sand stone 24"×8"×4" Marked ¼ at N. 89° 15' W. 1320 ft. I set a sand stone 16"×6"×6" for N.W. corner of N.E. ¼ of S.E. ¼ of Sec. 18, 40 rods North of the last named corner I set a lime stone by fence post for N.E. corner of A.G. McCormicke farm. From a point on the ¼ line 1280 ft. S. 89° 15' E. of the ¼ post on the West line of Section 18. or the S.E. corner of the S.W. ¼ of N.W. ¼ Sec. 18. I ran North at 40 rods I set a lime stone 15"×12"×8" as N.W. corner of A.G. McCormicke farm at 80 rods I set a lime stone 18"×14"×3" Marked × for N.E. corner of S.W. ¼ of N.W. ¼ of Sec. 18. at 2640 ft. came out 2 ft. East of established corner made proper correction by moving corner 1 ft. East I set a lime stone 28"×14"×5" as N.E. corner of N.W. ¼ of N.W. ¼ of Section 18. which completed the Survey. Var 9° 27'. Dated at Independence Montgomery County Kansas November 20, 1889.

J. L. Gibbard County Surveyor.

53.

Plat of Survey No. of
Sections 7 and 18 Twp. 32, Range 15.
Ordered by A. T. Cox
Completed November 20th. 1889.

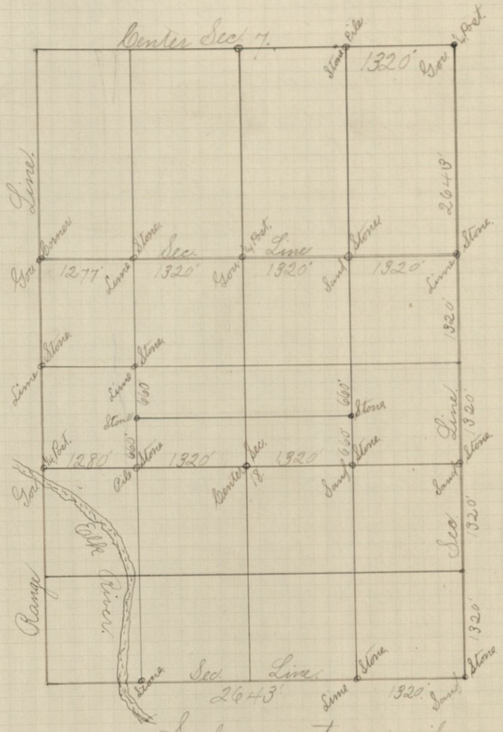

Scale. — — to one mile.

I hereby certify that the above is an accurate plat of said Survey.

J. L. Gibbard
County Surveyor.

Recorded Nov. 29, 1889 at 7 A. M.
J. L. Griffin Register of Deeds

J. Rat Lucas, County Engineer of Montgomery County do certify that the East line of Sec 7 T 32 S R 16 E was established from E ¼ thence North 270'

J Rat Lucas
Dec 19, 1962