

FIELD NOTES OF SURVEY NO.

Hamilton & Co. Manufacturers, Topeka, Kansas

I was ordered by W. W. Hall to survey and sub-divide the South $\frac{1}{2}$ of Section 35 Township 31, Range 13 East, as shown by the plat.

November 16, 1889 the following named parties were notified that a survey of the above named Section would be made on December 3rd 1889. L. W. Myers, W. W. Hall, Lloyd Hancock, Maria Bertenshaw, D. L. Bryant, John Davidson, William Oliver, Thomas Davidson, William Wilkey.

December 3, 1889, I began the survey. M. D. Bryant and C. E. Kell were selected as chain carriers and were sworn in. I began at the South West corner of Section 35, T. 31, R. 13. I found the Government corner standing. I ran East on South line of Section 35 or Township line at 2655 ft. found the Government $\frac{1}{4}$ post standing under a culvert at 5301 ft. found stone standing South East corner of Section 35. I then ran North at 1320 ft. drove stake for N.E. corner of S.E. $\frac{1}{4}$ of S.E. $\frac{1}{4}$ of Section 35 at 2640 ft.


Drove stake as temporary $\frac{1}{4}$ post on East line of Sec. 35. From this stake I ran North to Elk River 1600 ft. off set 200 ft. East ran North 1340 ft. to North line of Section ran West 200 ft. Found corner to be in Elk River as per field notes. This line I found to be correct. December 4, 1889.

I set a sand stone on the South line of Section 35, 1325 ft. West of the South East corner of Section 35, as the S.W. corner of the S.E. $\frac{1}{4}$ of the S.E. $\frac{1}{4}$ of Section 35. Stone 22" x 12" x 4" marked X. At a point (at temporary corner stake) 1320 ft. North of the S.E. corner of Section 35 I set a sand stone 28" x 14" x 4" marked X at 2640 ft. I set a sand stone 30" x 12" x 7" marked $\frac{1}{4}$ as the $\frac{1}{4}$ post on East line of Section 35, at a point 1325 ft. West of the N.E. corner of S.E. $\frac{1}{4}$ of S.E. $\frac{1}{4}$ Sec. 35. I set a sand stone 28" x 12" x 3 1/2" marked X for N.W. corner of S.E. $\frac{1}{4}$ of the S.E. $\frac{1}{4}$ Sec. 35. At 1656 ft. set a sand stone 24" x 15" x 9" marked X, for the S.W. corner of the E. $\frac{1}{2}$ of the E. $\frac{1}{2}$ of the N.W. $\frac{1}{4}$ of the S.E. $\frac{1}{4}$ of Section 35. I then ran North at 835 ft. South bank of Elk River here I set a sand stone 22" x 10" x 6" as a line stone which completed the survey. Var. $9^{\circ} 24'$.

Dated at Independence Montgomery County, Kansas, December 5, 1889.

J. L. Hibbard
County Surveyor.

Plat of Survey, N.E. $\frac{1}{4}$ of
Section 35, Twp. 31st, Range 13.
Ordered by W. W. Hall
Completed
December 4.

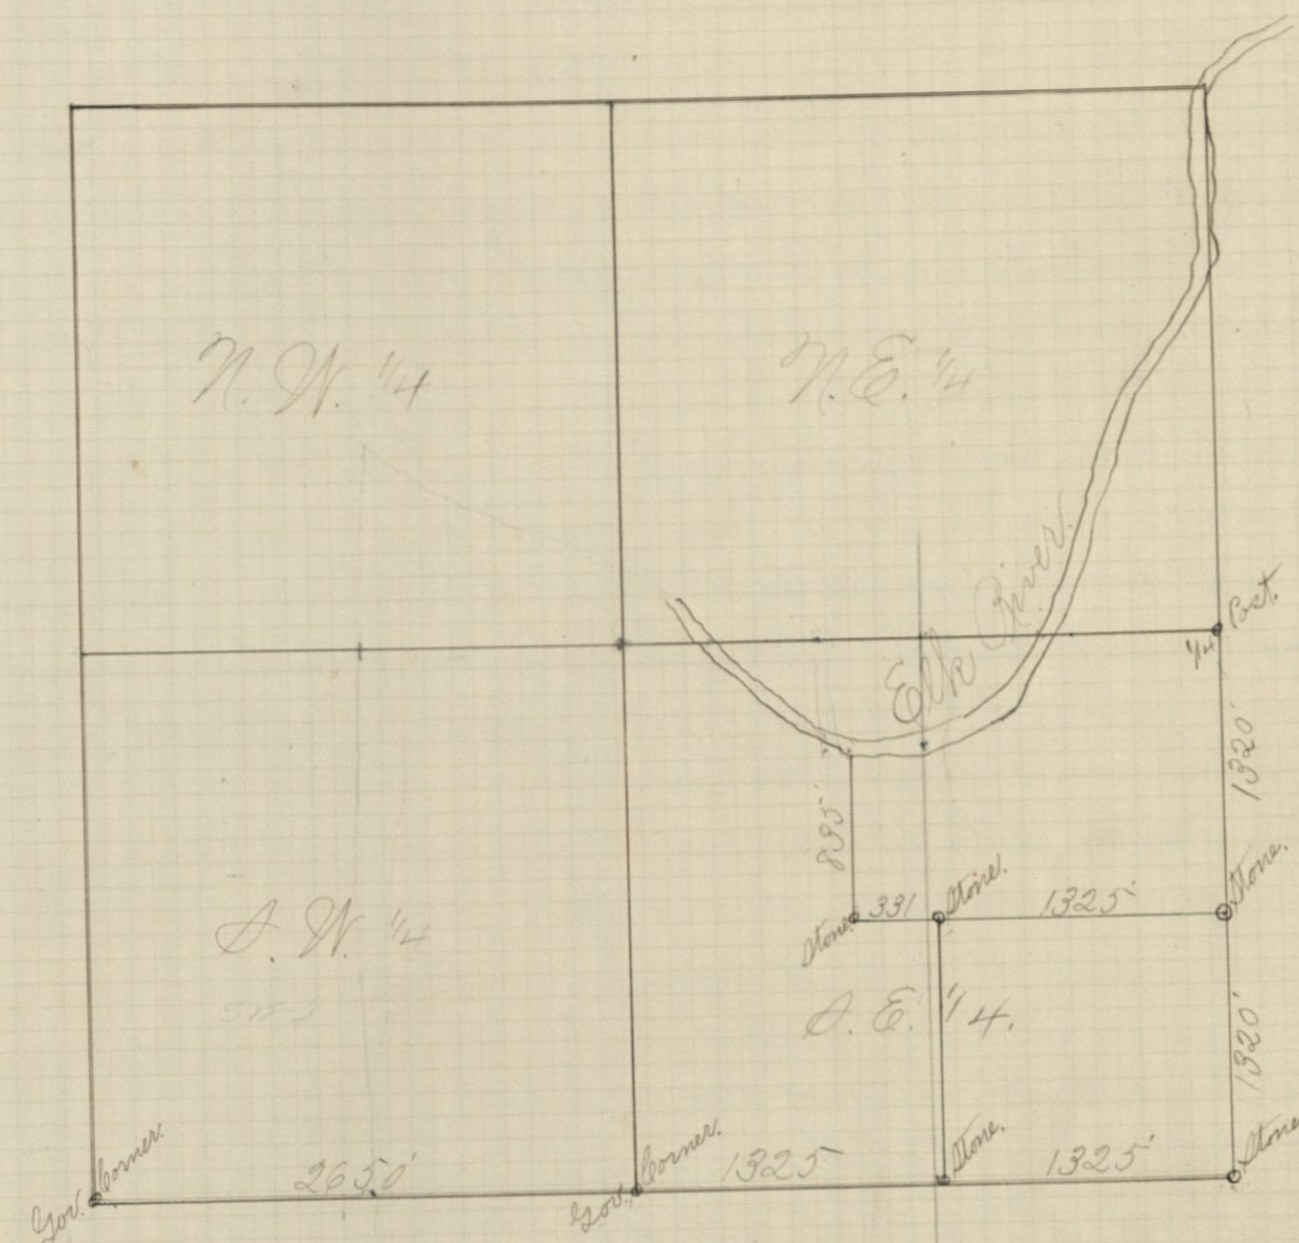

Scale: 1" = 1 mile.

I hereby certify that the above is an accurate plat of said Survey.

J. L. Hibbard
County Surveyor.

Recorded December 5, 1889, at 11 A.M.

J. L. Griffin Register of Deeds.