


FIELD NOTES OF SURVEY NO.

Hamilton & Carl, Manufacturers, Topeka, Kansas

Plat of Survey
No. of
Sections 3 & 10, Twp. 34, Range 16.
Ordered by
A. G. North
Completed
April 10th 1888.

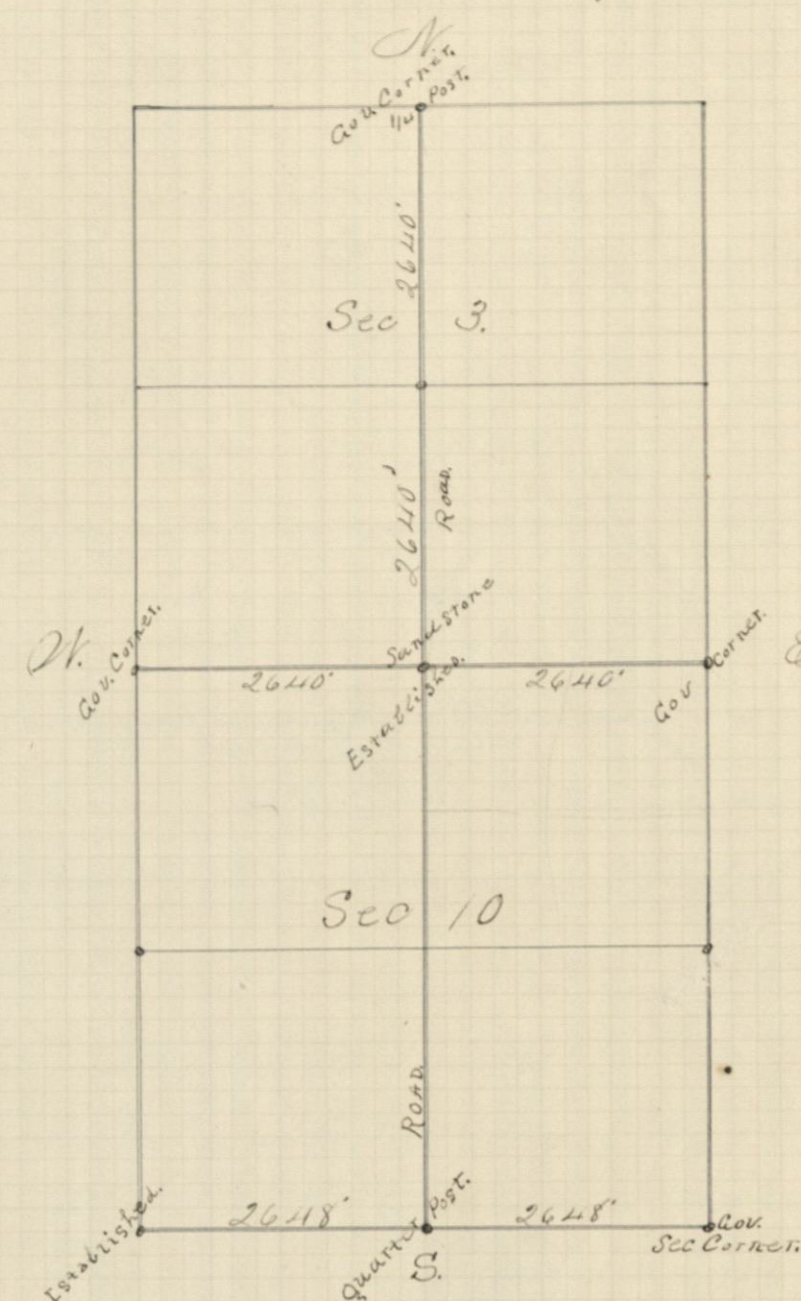

Scale 3 inches to one mile.

I hereby certify that the above is an accurate plat of said survey.

On March 28, 1888, I was ordered by A. G. North to survey and establish the quarter line running north and south through sections 3 and 10, T. 34, Range 16 East. On March 28, 1888, the following parties were notified that a survey would be made: Surveying and locating the centers of quarter lines of said sections on April 9, 1888.

Thomas Hooper	G. C. Levan
Luther Riggs	G. W. Cuckett
Frank Shipley	John D. Knox
Nate Bridley	A. G. North
Geo. Foster	W. C. Goldard.
James Avery	

On April 9, 1888, the South West corner of Section Ten (10), or where the original Government corner stood, was sworn to by the parties signing this oath.

We do solemnly swear that we can locate the corner to sections 9, 10, 15 & 16, Township 34, Range 16 East or within three feet of it as made by the Government Survey.

Signed { John C. Etchen.
John D. Young

Then and there set a lime stone at the point given 20x12x2 marked 1111. Noah Smith was sworn as chainman. J. L. Hibbard and Noah Smith proceeded to chain the south line of Section 10. T. 34 as above, which I found to be 5296 ft. long. I then set for a quarter post 2648 ft. East of South West corner of section 10 a lime stone 15x9x2, marked 14. I then ran a line north to the North line of Section 10 found a large sand stone marked by surveyors and is midway between the Government corners 2641 ft. to the N.E. corner of Sec. 10 and the same distance to the N.W. corner of the above named section. Finding this correct I established this sand stone as a 1/4 post. From the 1/4 post on the North line of section 10 I ran a random line N 45° E. at one mile I came out 21 feet East of the Government corner. To correct this line I ran S. 30° W. and came out to the 1/4 post on the South line of Section 3. T. 34 as above. The Government 1/4 post on the North line of section 3 was broken to establish a more permanent corner I set beside the Government corner a lime stone 30x10x2 1/2, marked 14. Var. 9° 30'.

Dated at Independence Kansas this 14th day of April 1888.

Recorded April 14, 1888 at 3 P. M.
J. L. Griffin Register of Deeds.

J. L. Hibbard